

## **2008-2013 MX-5**

### **ENGINE STALL AND / OR NO START**

Some customers may experience an engine stall and/or no start condition. This condition may be difficult to duplicate. If normal workshop manual diagnosis does not find a fault, check for aftermarket installed electronic devices.

These concerns may be caused by an aftermarket electronic device (see image below).


Aftermarket electronic devices connected to the vehicle's wiring harness may interfere with the vehicle's CAN system and may cause an engine stall and/or no start condition.

**Note:** This condition may or may not store multiple CAN system DTCs.



**Original Factory Power Retractable Hardtop Module**

**Aftermarket Hardtop Module**

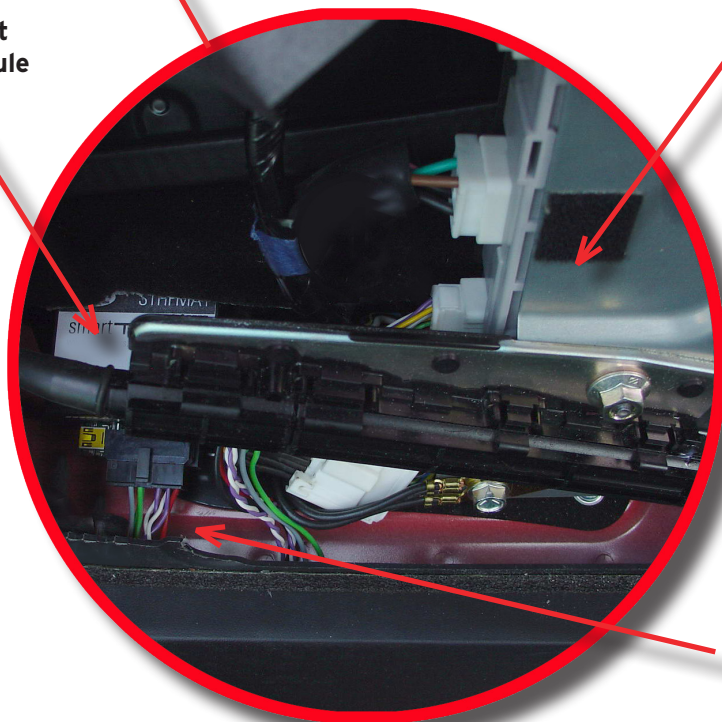

**Aftermarket Hardtop Module Sub-harness**

#### **Warranty Compliance Note:**

Vehicle repairs for this concern are not covered under Mazda's warranty policy if the vehicle has been modified.